









ELBE Natural Surface®

Beauty, in a natural way





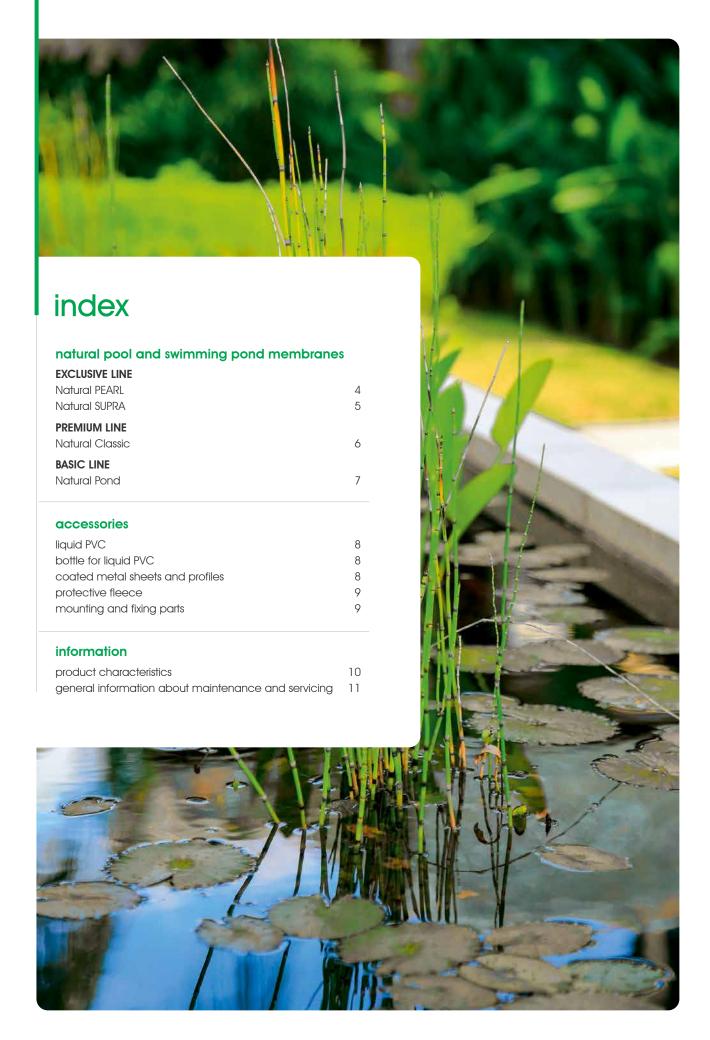

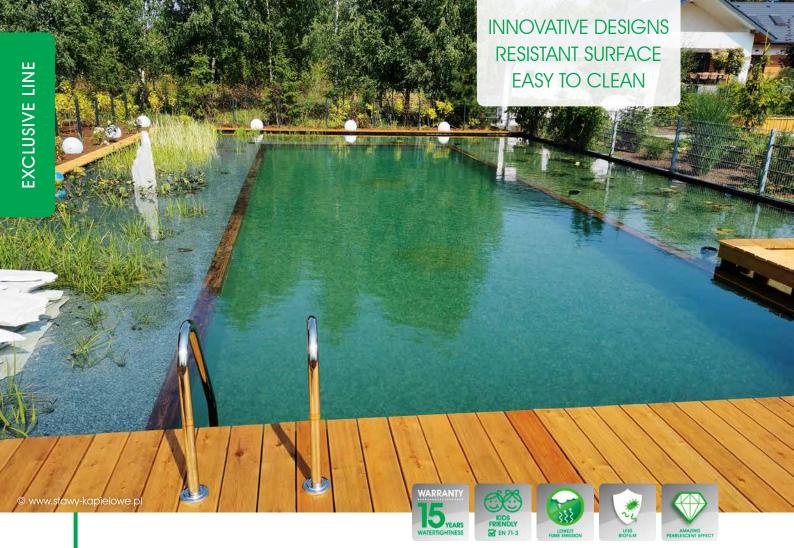

Natural PEARL

reinforced membrane for swimming pools with unique reflections and special coated surface

Natural PEARL swimming pond membranes are the most efficient in their class. Whether for a biological pool, swimming pond, or natural pool, the Natural PEARL membrane is perfectly suited for natural waters, offering a unique bathing experience immersed in nature. With their exceptional reflective properties, Natural PEARL swimming pond membranes provide a natural shine. A specialized surface treatment makes them particularly easy to clean, simplifying biofilm removal. Beyond their natural appearance, Natural PEARL membranes boast high UV resistance, helping to slow premature aging. Additionally, their ease of installation further enhances the outstanding qualities of this reinforced membrane.

unique reflection effect | UV stabilized | biocide-free | easy to clean | easy to weld | reinforced

thickness 1.6 mm roll length 25 m width **1.65 m** package 8 rolls per pallet



Slate Grey ref. no. 🔁 2001140

Available on stock.



Natural SUPRA

reinforced membrane with special coated surface

Natural SUPRA reinforced swimming pond membranes provide a pure natural experience. Thanks to their special surface, dirt, discoloration, and time-consuming cleaning are a thing of the past. Biofilm removal is effortless. The specialized surface treatment protects against premature aging, extending the lifespan of the sealing membrane. Natural SUPRA is extremely durable and highly resistant to all stresses. In addition to its outstanding product features, it also offers a truly natural swimming experience.

UV stabilized | biocide-free | easy to weld | easy to clean | reinforced



Available on stock.



Natural Classic

reinforced pond membrane

Natural Classic is a reinforced membrane for coating swimming ponds or natural pools. This waterproofing membrane is particularly resistant to external influences and has an exceptional longevity. This reinforced membrane, tested according to EN 71-3 consists of ultra-pure raw materials, as well as Natural PEARL and Natural SUPRA, which are among the most health-friendly membranes on the natural swimming pool market. Natural Classic also stands out from a sanitary point of view, unlike other competing products, since it emits the lowest level of fume emission during welding, thus preserving the health of installers.

UV stabilized | biocide-free | easy to weld | easy to clean | reinforced

thickness 1.5 mm roll length 25 m width 2.00 m package 12 rolls per pallet

Green/Black ref. no. 🕏 2000366

Available on stock



Natural Pond

hydraulic engineering and pond construction – also for filtered ponds and regeneration zones

UV-stabilized and resistant to weather and cold, Natural Pond can be used flexibly in pond and water construction. This pond liner is the perfect solution especially in filtered ponds or when designing regeneration areas. Natural Pond is not reinforced and available in different thicknesses and colors.

UV stabilized \mid easy to weld \mid easy to clean \mid without fabric

roll length 15 / 20 / 30 m width 2.00 m

Green

ref. no.	thickness	roll length	package
2000348*	1.5 mm	15 m	15 rolls per pallet




Anthracite

ref. no.	thickness	roll length	package
2001285	0.5 mm	30 m	21 rolls per pallet
2001286	1.0 mm	20 m	15 rolls per pallet
2001287	1.5 mm	15 m	15 rolls per pallet



Black

ref. no.	thickness	roll length	package
2000608*	2.0 mm	15 m	10 rolls per pallet



*Available on request.



accessories

accessories for professional installation

Our ELBE Natural Surface® membranes are ideal for waterproofing natural pools, swimming ponds and natural pools, easy and quick to install on any surface and support. Note, however, the importance of the right accessory during the installation, guaranteeing a perfect result.

ELBE liquid PVC

(Delivery only in full package units.)

content 950 ml per can package 6 cans per box



We recommend the application of ELBE liquid PVC to ensure sealing and take care of the aesthetic appearance of the weld seam. However, this product does not replace the hot air welding quality of reinforced membranes. It also drastically reduces dirt deposits at the weld seam. It should be noted that all ELBE liquid PVCs, with the exception of Green, Dark Green and Slate Grey, contain biocides and can therefore only be limited in their use in natural swimming pools. The viscosity can be improved with the addition of acetone.

Our liquid PVCs match the colors of our membranes and are recommended as follows:

color	Slate Grey	Dark Green	Green	Light Grey	Sand	Transparent
ref. no.	2001143	2001142	2000860	2000865	2000858	2000856

bottle for liquid PVC

content 500 ml package from 1 pc

2100085 ref. no.



coated metal sheets and profiles

thickness 1.2 mm



	sheet	sheet*	sheet stainless steel V2A	exterior angle	interior angle	strip
color	Blue	Grey	Blue	Blue	Blue	Blue
dimensions	2000 × 1000 mm	$2000 \times 1000 \text{ mm}$	2000 × 1000 mm	$50 \times 50 \times 2000 \text{ mm}$	$50 \times 50 \times 2000 \text{ mm}$	50 × 2000 mm
package	1 pallet = 30 pcs	1 pallet = 30 pcs	1 pallet = 30 pcs	10 pcs	10 pcs	10 pcs
ref. no.	2001301	2100078	2100346	2001302	2001305	2001306

^{*}Available on request.

accessories

for professional installation

protective fleece

polyester fleece 300 g/m², $1.5 \text{ m} \times 50 \text{ m}$

DIN 4102 B2 (drillable), white

package 6 rolls per pallet 2100358 ref. no.

polyester fleece 300 g/m², $2 \text{ m} \times 50 \text{ m}$

DIN 4102 B2 (drillable), white

package 6 rolls per pallet 2100061 ref. no.



antibacterial polyester fleece

300 g/m², 1,5 m \times 50 m drill- & screw-resistant, light green

thickness 2 mm

6 rolls per pallet package 2001349 ref. no.

antibacterial polyester fleece

300 g/m², 2 m \times 50 m drill- & screw-resistant, light green

thickness 2 mm

6 rolls per pallet package 2001348 ref. no.



fleece adhesive

content 5 kg package 1 unit 2100397 ref. no.



mounting and fixing parts

fastener rivet short

4.8 mm × 20.3 mm dimensions package 12 packs per box content per 200 pcs 2100275 ref. no.





fastener rivet long

4.8 mm × 35 mm dimensions package 12 packs per box content per 100 pcs 2100382 ref. no.

ELBE Thermo Glue

4,5 kg content package from 1 pack 2001329 ref. no.





cold welding agent THF

1000 ml content package 6 pcs per pack 2100039 ref. no.


product characteristics


	Natural PEARL	Natural SUPRA	Natural Classic	Natural Pond
PRODUCT FEATURES	NATURAL EX	CLUSIVE LINE	natural Premium line	NATURAL BASIC LINE
APPLICATIONS				
swimming ponds, natural ponds	✓	~	~	
(artifical) ponds and lakes	V	~	~	✓
irrigation basins, fire protection ponds, rainwater retention reservoirs			~	✓
TECHNICAL FEATURES				
reinforced (high strength and dimensional stability)	~	✓	✓	
coated surface	✓	✓		
UV stability	v	~	~	~
cold and weather resistance	V	~	~	✓
HEALTH AND ENVIRONMENT			1	
EN 71-3 – kidsfriendly	V	~	~	
non-toxic for fish and plants	V	✓	✓	
lowest fume emission during welding	v	~	~	~
SURFACE AND CLEANING				
surface easy to clean	++	++	+	+
stain resistant	++	++	+	
less biofilm	~	✓		
printed designs	V			
WARRANTIES				
warranty watertightness	15 years	15 years	10 years	10 years (Natural Pond 150 & 200)



General information about maintenance and servicing

- The membranes of natural pools and swimming pools of the ELBE Natural Surface® range are suitable for natural water treatment (by filtration for example).
- Regular maintenance preserves water quality (e.g., by sucking leaves and pollen).
- Before entering the pool, it is recommended to remove makeup and take a shower to get rid of any sunscreen (Preservation of the biological balance of the water.).
- · Easy and environmentally friendly cleaning without chlorine-based products.
- Cleaning with soft cloths or sponges (do not use hard brushes or pressure washers!).
- Easy winter maintenance (e.g., with the installation of a net tarpaulin to retain the leaves)

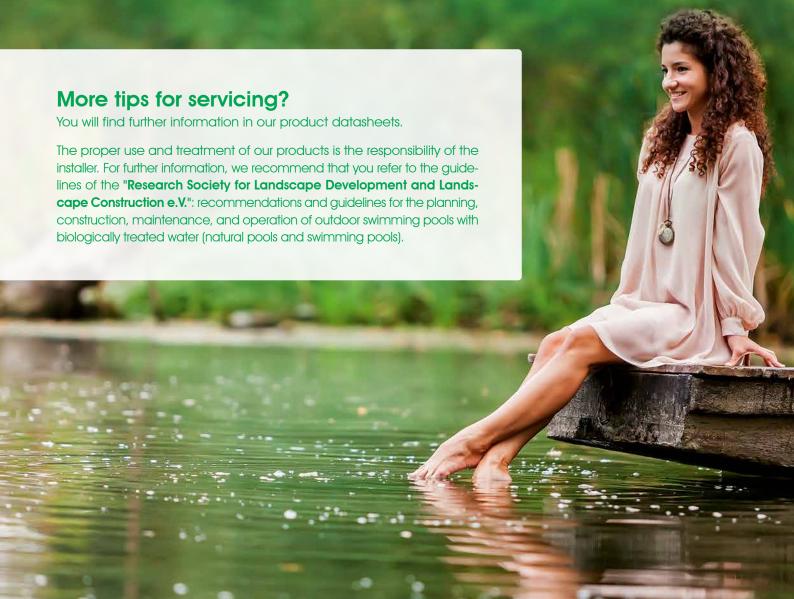

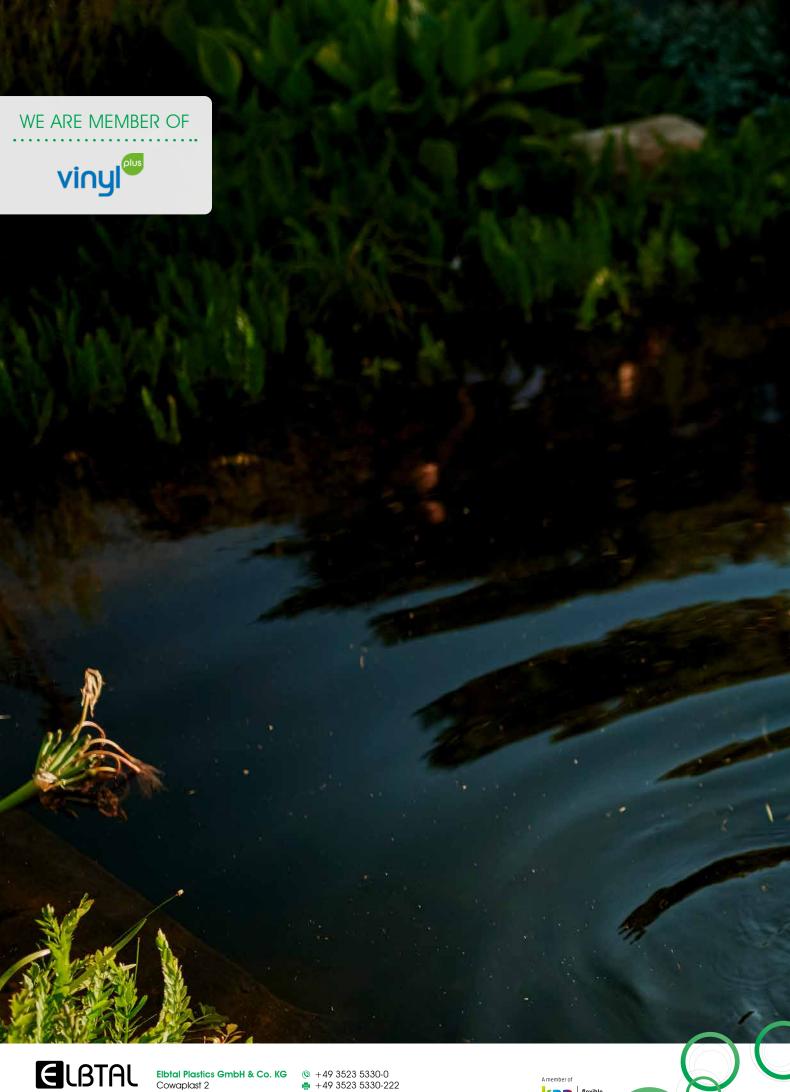



01640 Coswig | Germany